



Multi PVA Buck Boost Three Phase Grid Interconnection with Different Solar Irradiation

Rupesh Sharma¹, Sujeet Kumar Soni², Prakhar Singh Bhadoria³

¹ M.Tech Scholar, Department of Electrical and Electronics, LNCT BHOPAL

² Assist. Professor, Department of Electrical and Electronics, LNCT, Bhopal

³ Assist. Professor, Department of Electrical and Electronics, LNCT, Bhopal

ABSTRACT

A solitary stage grid associated transformer less photovoltaic (PV) inverter which can work either in buck or in lift mode, and can extract maximum power all the while from two sequentially associated subarrays while each of the subarray is facing distinctive natural conditions, is exhibited in this paper. As the inverter can work in buck just as in lift mode relying upon the necessity, the imperative on the base number of sequentially associated sunlight based PV modules that is required to frame a subarray is extraordinarily decreased. Therefore power yield from each of the subarray increments when they are presented to various ecological conditions. The topological configuration of the inverter and its control methodology are planned so the high recurrence segments are absent in the regular mode voltage in this manner confining the greatness of the spillage current related with the PV clusters inside as far as possible. Further, high working efficiency is achieved all through its working reach. A point by point investigation of the system prompting the advancement of its scientific model is completed. The practicality of the plan is confirmed by performing point by point reenactment thinks about. A 1.5 kW research center model is created, and point by point trial studies are completed to verify the legitimacy of the plan.

Keywords: PV Array, MPPT, Buck-Boost Converter, Three Phase inverter.

INTRODUCTION

THE significant worry of a photo voltaic (PV) system is to guarantee ideal execution of individual PV modules in a PV cluster while the modules are presented to various natural conditions emerging because of distinction in isolation level and additionally contrast in working temperature. The nearness of befuddle in working state of modules significantly lessens the power output from the PV cluster [1]. The issue with the confused natural conditions (MEC) moves toward becoming significant if the quantity of modules associated in arrangement in a PV cluster is enormous. So as to achieve wanted size for the info dc interface voltage of the inverter of a grid associated transformer less PV system, the necessity of arrangement associated modules turns out to be high. In this manner, the power output from a grid associated transformer less (GCT) PV system, for example, single stage GCT (SPGCT) inverter based systems got from H-connect [2], [3] and nonpartisan point cinch (NPC) inverter based systems [4], [5] get influenced significantly during MEC.



II. PHOTO VOLTAIC ARRAY

For efficient inexhaustible electricity age PVA is applied to create power from daylight-primarily based mild. because the load request is expanding little by little the strength age additionally should be increased, however because of the conventional method for power age is inflicting an unnatural weather change, because of this the proficiency of the PVA need to be elevated through along with silicon surface the board and moreover, utilize the MPPT techniques to track maximum severe strength amid any light and air conditions. The outline of PVA is completed in MATLAB with Simulink.

Voltage of PVA totally is based upon solar-orientated illumination (S_x) and surrounding temperature (T_x). PVA (picture voltaic showcase) is a mix of association and parallel sun powered cells orchestrated in a cluster to produce the desired voltage and contemporary. each association mix of cells may be considered as photograph voltaic module. Increment in association cells expands the voltage and increment in parallel cells builds the cell limit. Detailing for voltage of each cell is given below

$$V_c = \frac{AkT_c}{e} \ln \left(\frac{I_{ph} + I_o - I_c}{I_o} \right) - R_s I_c \quad (1)$$

Where, k = Boltzmann constant (1.38×10^{-23} J/K).

I_c = cell output current, Amp.

I_{ph} = photocurrent

I_o = reverse saturation current of diode

R_s = series resistance of cell

T_c = reference cell operating temperature

V_c = cell voltage, V.

The DC-DC converter utilized as a part of the MPPT can be either a Cuk converter or a buck boost converter. The voltage yield of the PVA both need to be accelerated or faded as for the produced power of the PVA. The converter makes the voltage steadily with the adjustment inside the temperature or the light. The control structure can provide an obligation cycle esteem which is contrasted with the triangular waveform and heartbeat is produced fed to the transfer gave. The responsibility cycle is created by way of utilising the underneath calculation.

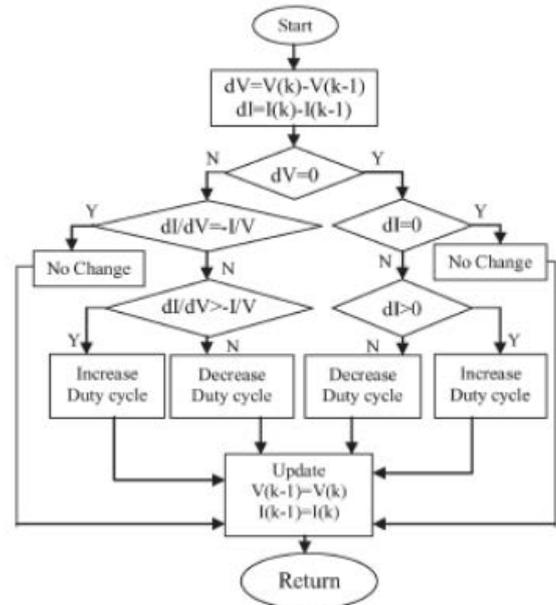


Fig. 1: MPPT algorithm

The control technique used to govern the VSI (Voltage source Inverter) utilizes IRP (immediately Reactive power) hypothesis. This control method figures the specified responsive energy that must be infused to repay the need of the load. It takes a criticism of the load cutting-edge and furthermore supply voltage to persuade the DG to synchronize to the matrix. by growing the reference of the modern the system produces six heartbeats for six switches utilizing PWM (Pulse width regulation) strategy.

The PVA likewise makes use of a MPPT calculation to govern the yield of the PVA. The MPPT (maximum strength factor monitoring) makes use of Incremental conductance approach to create regular strength from the PVA even with the alternate in sun-based totally illuminations levels. On the off chance that PV sun powered boards are constructed from individual photovoltaic cells related together, at that point the sun Photovoltaic Array, moreover stated just as a solar Array is a machine made up of a meeting of sun-based boards related together. A photovoltaic show off is on this way numerous solar-orientated boards electrically stressed together to frame a



considerably bigger PV establishment (PV system) called a cluster, and all in all the bigger the mixture surface territory of the exhibit, the extra solar-oriented strength it's going to create.

The framework interconnected PVA using MPPT is regarded within the fig. 1.1 underneath.

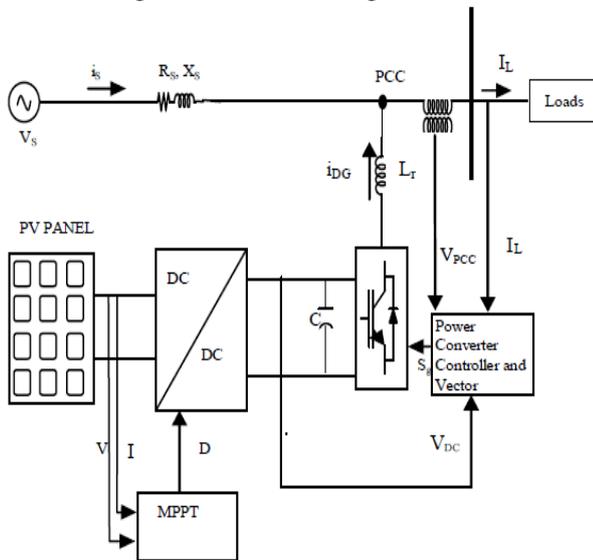


Fig. 2. System configuration with PVA

An entire photovoltaic machine utilizes a photovoltaic cluster as the number one hotspot for the era of the electric strength deliver.

The measure of sun powered power brought by means of a solitary photovoltaic board or module is not enough for trendy make use of most fabricates create trendy PV boards with a yield voltage of 12V or 24V. by means of associating numerous single PV forums in arrangement (for a better voltage necessity) and in parallel (for a better contemporary prerequisite) the PV cluster will supply the coveted electricity yield.

Photovoltaic cells and boards alternate over the sun powered power into coordinate modern (DC) power. The association of the sun-oriented boards in a solitary photovoltaic showcase is identical as that of the PV cells in a solitary board. The boards in an exhibit may be electrically related collectively in both an arrangement, a parallel, or a blend of the 2, but for the maximum element an arrangement affiliation is given an elevated yield voltage. as an example, whilst solar-

based totally forums are stressed out collectively in arrangement, their voltage is doubled even as the present day maintains as earlier than.

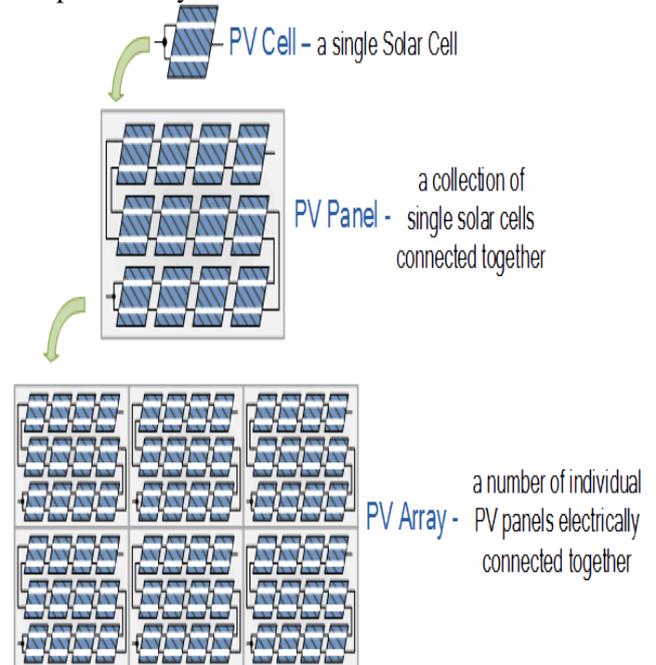


Fig.3. A Photovoltaic sun Array

The span of a photovoltaic show off can incorporate of multiple character PV modules or boards associated collectively in a city area and set up on a housetop, or can also comprise of a big number of PV forums interconnected collectively in a field to deliver power for an entire town or community. The adaptability of the secluded photovoltaic showcase (PV gadget) permits architects to make sun-orientated energy systems that could meet a extensive assortment of electrical wishes, irrespective of how extensive or small.

It's far important to take note of that photovoltaic forums or modules from various makers ought now not be blended in a solitary showcase, regardless of whether their power, voltage or present-day yields are ostensibly comparable. this is on account of contrasts in the I-V trademark bends of the boards and also their ghostly reaction is probably going to motive extra befuddle misfortunes within the cluster lessening its effectiveness



III. SIMULATION RESULT AND DISCUSSION

To exhibit the efficacy of the proposed inverter a PV cluster comprising of two PV subarrays while each of the subarray having four arrangement associated Canadian sun based polycrystalline modules 'CS6P-165PE' [15] is considered. The MPP parameters of each subarray at standard test condition (STC) are as per the following: $V_{pv1} = V_{pv2} = 116$ V, $I_{pv1} = I_{pv2} = A_n$ and $P_{pv1} = P_{pv2} = 661$ W. The parameters which are utilized to mimic the proposed inverter are demonstrated in Table I. Matlab-Simulink stage is used to reproduce the exhibition of the proposed inverter.

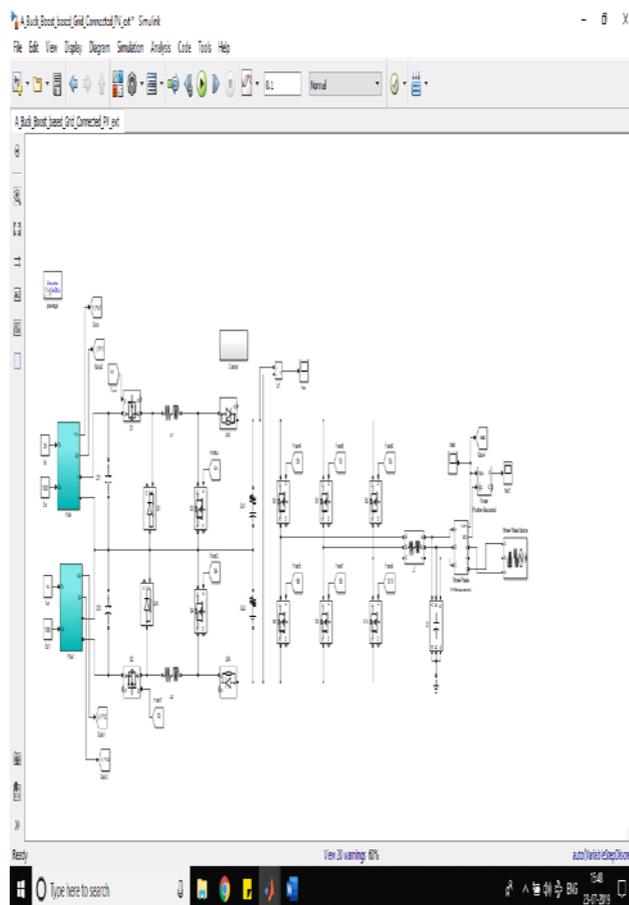


Fig. 4. Proposed two PVA Buck boost converter with three phase inverter

The variety in insolation level and temperature concerning time which is considered for the two

subarrays to show the viability of the proposed inverter are classified in Table II. Assessed variety of P_{pv1} , P_{pv2} along with different parameters I_{gm} , V_{co1m} , V_{co2m} , pinnacle of $iL1$ ($IL1m$) and pinnacle of $iL2$ ($IL2m$) are additionally demonstrated in a similar table. Fig. 6(a)- (c) speaks to the variety of P_{pv1} , P_{pv2} , V_{pv1} , V_{pv2} , I_{pv1} , I_{pv2} of the two subarrays and furthermore show the capacity of the proposed inverter to work the two subarrays at the same time at their separate MPP. Variety in i_g , $iL1$, $iL2$, v_{co1} and v_{co2} alongside their magnified renditions for two distinctive insolation levels are delineated in Figs. 7 to 9. The assessed estimations of the previously mentioned amounts as organized in Table II fit in with that of got through recreation ponders in this manner guaranteeing the suitability of the proposed plan.

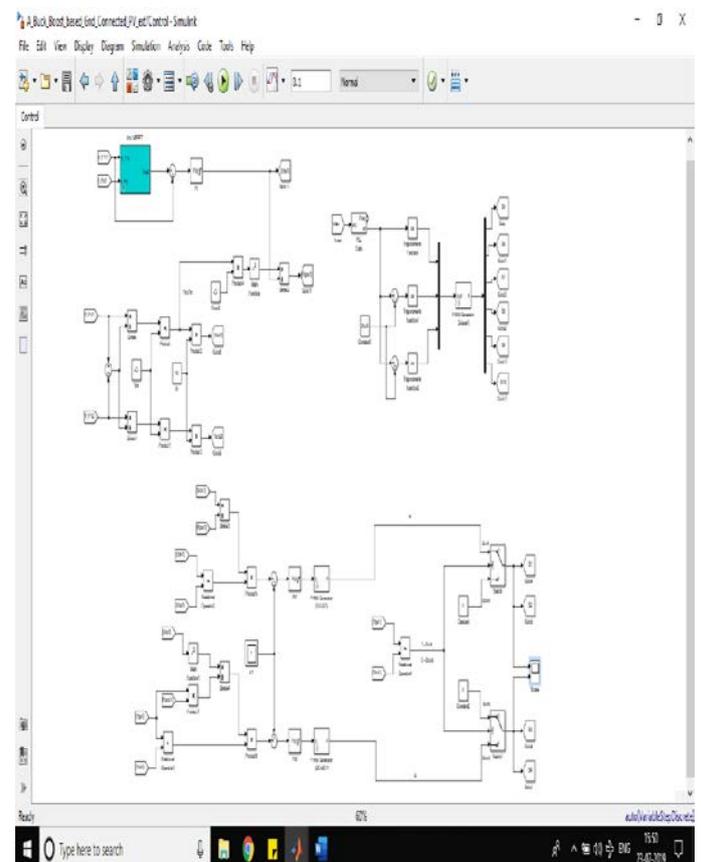


Fig. 5. Control structure of buck boost converter and three phase inverter

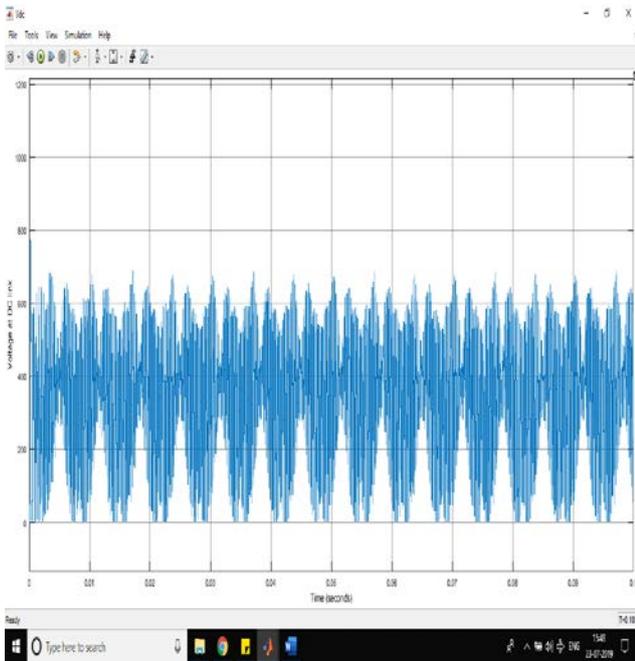


Fig. 6. DC voltage output of buck boost converter

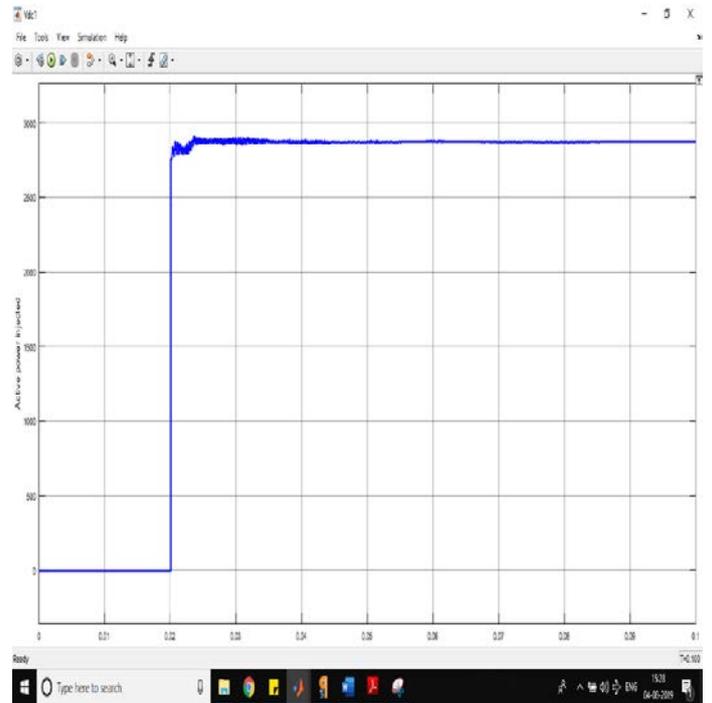


Fig. 8: Active power injected from PVA to grid

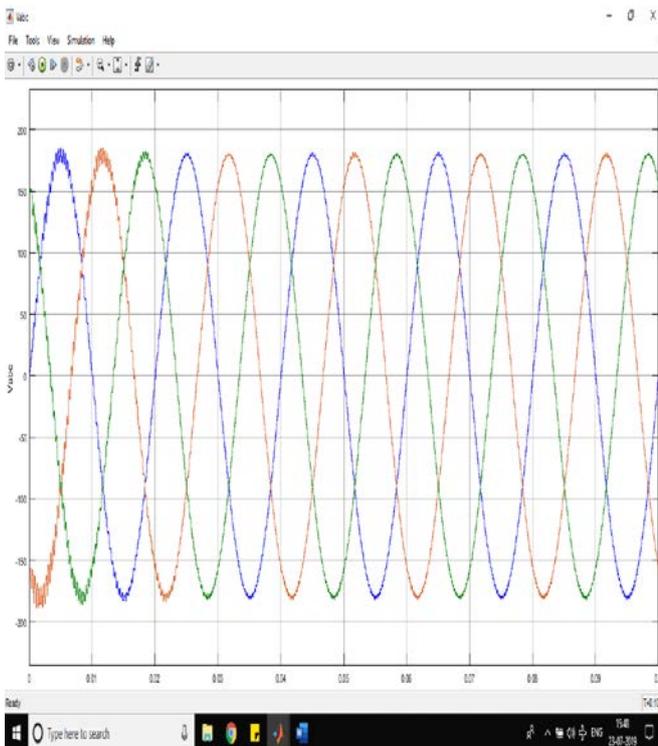


Fig. 7. Three phase inverter output

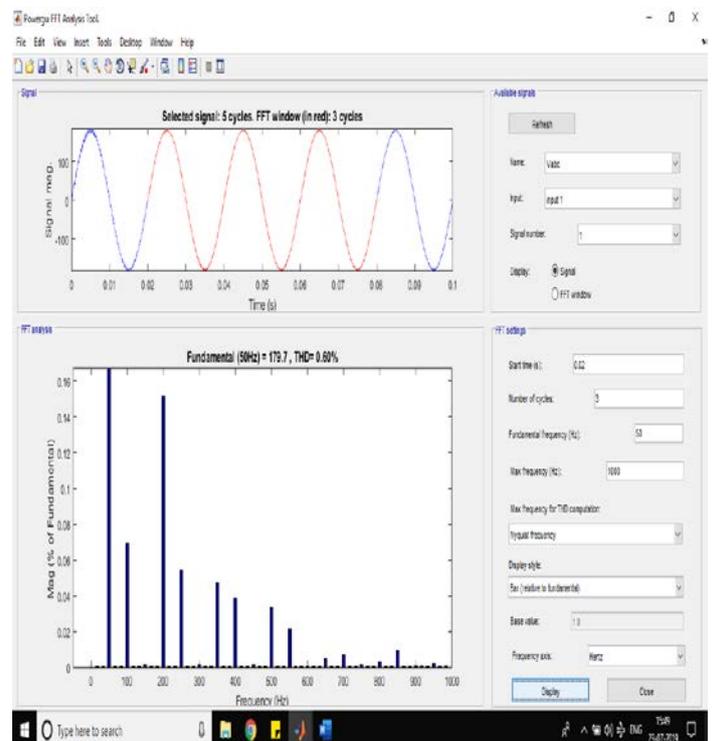


Fig. 9. Phase A harmonic distortion

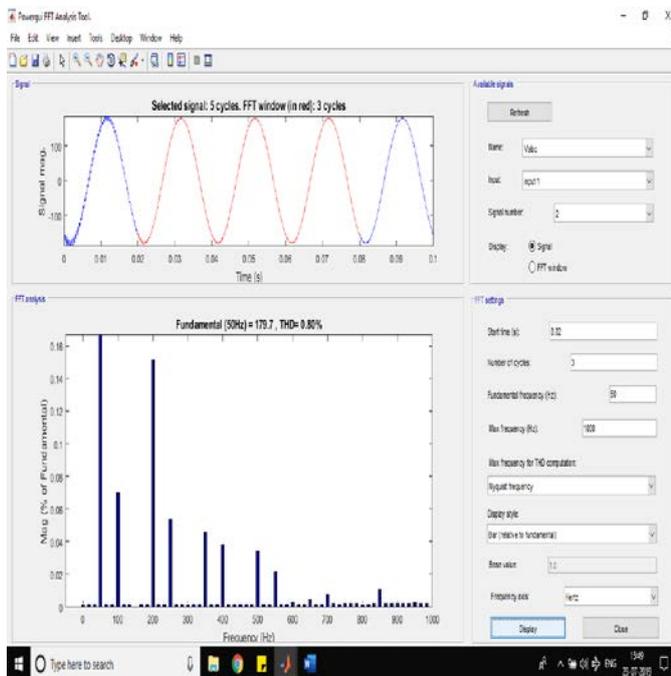


Fig. 10. Phase B harmonic distortion

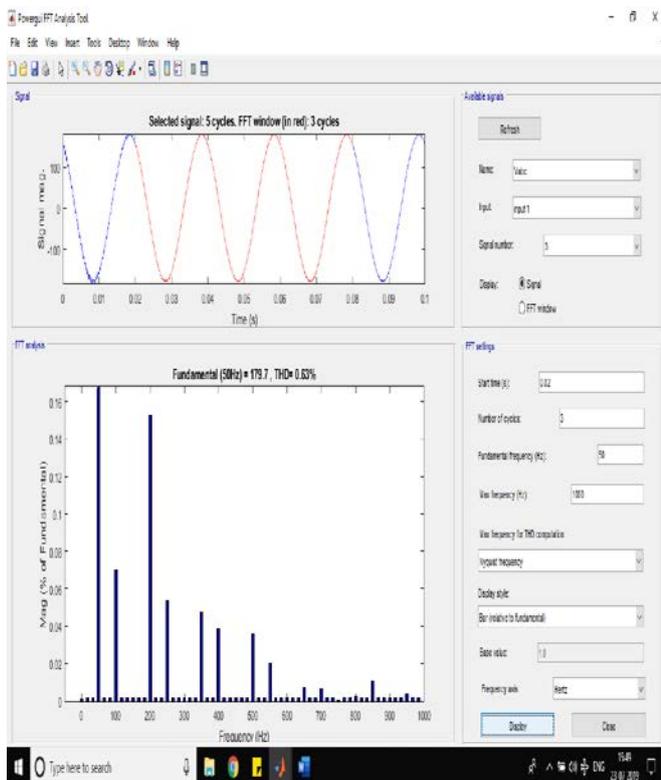


Fig. 11. Phase C harmonic distortion

IV. CONCLUSION AND FUTURE SCOPE

A solitary stage grid associated transformerless buck and lift based PV inverter which can work two subarrays at their particular MPP was proposed in this paper. The attractive highlights of this inverter were i) impact of bungled natural conditions on the PV cluster could be managed in a viable manner, ii) working efficiency achieved, euro = 97.02% was high, iii) decoupled control of segment converters was conceivable, iv) straightforward MPPT calculation was utilized to guarantee MPP activity for the part converters, v) spillage current related with the PV exhibits was inside the farthest point referenced in VDE 0126-1-1. Scientific investigation of the proposed inverter prompting the improvement of its small signal model was done. The paradigm to choose the estimations of the output filter segments was displayed. The plan was approved via doing definite reenactment thinks about and in this manner the reasonability of the plan was found out via doing careful trial ponders on a 1.5 kW model of the inverter created for the reason.

V. REFERENCES:

- [1] T. Shimizu, O. Hashimoto, and G. Kimura, "A novel high-performance utility-interactive photovoltaic inverter system," *IEEE Trans. Power Electron.*, vol. 18, no. 2, pp. 704-711, Mar. 2003.
- [2] S. V. Araujo, P. Zacharias, and R. Mallwitz, "Highly efficient single-phase transformerless inverters for grid-connected photovoltaic systems," *IEEE Trans. Ind. Electron.*, vol. 57, no. 9, pp. 3118-3128, Sep. 2010.
- [3] B. Ji, J. Wang, and J. Zhao, "High-efficiency single-phase transformerless PV H6 inverter with hybrid modulation method," *IEEE Trans. Ind. Electron.*, vol. 60, no. 5, pp. 2104-2115, May 2013.
- [4] R. Gonzalez, E. Gubia, J. Lopez, and L. Marroyo, "Transformerless single phase multilevel-based photovoltaic inverter," *IEEE Trans. Ind. Electron.*, vol. 55, no. 7, pp. 2694-2702, Jul. 2008.



- [5] H. Xiao and S. Xie, "Transformerless split-inductor neutral point clamped three-level PV grid-connected inverter," *IEEE Trans. Power Electron.*, vol. 27, no. 4, pp. 1799-1808, Apr. 2012.
- [6] A. Bidram, A. Davoudi, and R. S. Balog, "Control and circuit techniques to mitigate partial shading effects in photo voltaic arrays," *IEEE J. Photovolt.*, vol. 2, no. 4, pp. 532-546, Oct. 2012.
- [7] N. D. Kaushika, and N. K. Gautam, "Energy yield simulations of interconnected solar PV arrays," *IEEE Trans. Energy Convers.*, vol. 18, no. 1, pp. 127-134, Mar. 2003.
- [8] H. Patel, and V. Agarwal, "Maximum power point tracking scheme for PV systems operating under partially shaded conditions," *IEEE Trans. Ind. Electron.*, vol. 55, no. 4, pp. 1689-1698, Apr. 2008.
- [9] D. Nguyen, and B. Lehman, "An adaptive solar photovoltaic array using model-based reconfiguration algorithm," *IEEE Trans. Ind. Electron.*, vol. 55, no. 7, pp. 2644-2654, Jul. 2008.
- [10] G. V.-Quesada, F. G.-Gispert, R. P.-Lopez, M. R.-Lumbreras, and A. C.-Roca, "Electrical PV array reconfiguration strategy for energy extraction improvement in grid-connected PV systems," *IEEE Trans. Ind. Electron.*, vol. 56, no. 11, pp. 4319-4331, Nov. 2009.
- [11] L. F. L. Villa, T.-P.Ho, J.-C. Crebier, and B. Raison, "A power electronics equalizer application for partially shaded photovoltaic modules," *IEEE Trans. Ind. Electron.*, vol. 60, no. 3, pp. 1179-1190, Mar. 2013.
- [12] P. Sharma, and V. Agarwal, "Maximum power extraction from a partially shaded PV array using shunt-series compensation," *IEEE J. Photovolt.*, vol. 4, no. 4, pp. 1128-1137, Jul. 2014.
- [13] N. Femia, G. Lisi, G. Petrone, G. Spagnuolo, and M. Vitelli, "Distributed maximum power point tracking of photovoltaic arrays: novel approach and system analysis," *IEEE Trans. Ind. Electron.*, vol. 55, no. 7, pp. 2610-2621, Jul. 2008.
- [14] C. Olalla, C. Deline, D. Clement, Y. Levron, M. Rodriguez, and D. Maksimovic, "Performance of power-limited differential power processing architectures in mismatched PV systems," *IEEE Trans. Power Electron.*, vol. 30, no. 2, pp. 618-630, Feb. 2015.
- [15] E. Karatepe, T. Hiyama, M. Boztepe, and M. C. Olak, "Voltage based power compensation system for photo voltaic generation system under partially shaded insolation conditions," *Energy Convers.and Manage.*, vol. 49, pp. 2307-2316, Aug. 2008.
- [16] A. A. Elserougi, M. S. Diab, A. M. Massoud, A. S. Abdel-Khalik, and S. Ahmed, "A switched PV approach for extracted maximum power enhancement of PV arrays during partial shading," *IEEE Trans. Sustain. Energy*, vol. 6, no. 3, pp. 767-772, Jul. 2015.
- [17] I. Patrao, G. Garcera, E. Figueres, and R. Gonzalez-Medina, "Grid-tie inverter topology with maximum power extraction from two photovoltaic arrays," *IET Renewable Power Gener.*, vol. 8, no. 6, pp. 638-648, 2014.
- [18] D. Debnath and K. Chatterjee, "Maximising power yield in a trans-formerless single phase grid connected inverter servicing two separate photovoltaic panels," *IET Renewable Power Gener.*, vol. 10, no. 8, pp. 1087-1095, 2016.
- [19] N. A. Ahmed, H. W. Lee, and M. Nakaoka, "Dual-mode time-sharing sine wave-modulation soft switching boost full-bridge one-stage power conditioner without electrolytic capacitor DC link," *IEEE Trans. Ind. Appl.*, vol. 43, no. 3, pp. 805-813, May/Jun. 2007.
- [20] Z. Zhao, M. Xu, Q. Chen, J. S. Lai, and Y. Cho, "Derivation, analysis, and implementation of a Boost-Buck converter-based high-efficiency PV



inverter,” IEEE Trans. Power Electron., vol. 27, no. 3, pp. 1304-1313, Mar. 2012.

[21] W. Wu, J. Ji, and F. Blaabjerg, “Aalborg inverter a new type of buck in buck, boost in boost grid-tied inverter,” IEEE Trans. Power Electron., vol. 30, no. 9, pp. 4784-4793, Sept. 2015.

[22] R. Teodorescu, M. Liserre and P. Rodriguez, Grid converters for photovoltaic and wind power systems, John Wiley & Sons Ltd., 2011, ISBN: 978-0-470-05751-3.

[23] W. Li, Y. Gu, H. Luo, W. Cui, X. He, and C. Xia, “Topology review and derivation methodology of single phase transformerless photovoltaic inverters for leakage current suppression,” IEEE Trans. Ind. Electron., vol. 62, no. 7, pp. 4537-4551, Jul. 2015.

[24] W. Wu, Y. He, and F. Blaabjerg, “An LLCL power filter for single-phase grid-tied inverter,” IEEE Trans. Power Electron., vol. 27, no. 2, pp. 782-789, Feb. 2012.

[25] Information on Canadian solar module CS6P-165PE. [Online]. Available: www.solarhub.com/product-catalog/pv-odules/124